


OVERVIEW

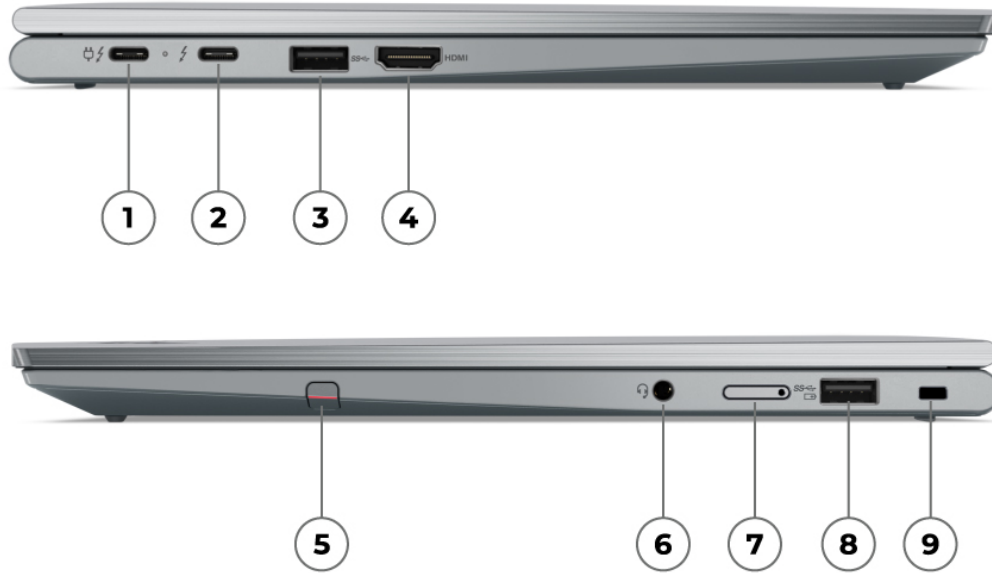

1. Thunderbolt 4	6. Headphone / microphone combo jack (3.5mm)
2. Thunderbolt 4	7. Nano-SIM card slot *
3. USB 3.2 Gen 1	8. USB 3.2 Gen 1 (Always On)
4. HDMI	9. Kensington Nano Security Slot
5. Pen slot	

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

13th Generation Intel® U or P Series Core™ i5 / i7 Processor

Processor**

Processor Name	Cores	Threads	Max Frequency	Cache	Processor Graphics
Core i5-1335U	10 (2 P-core + 8 E-core)	12	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel Iris® Xe Graphics
Core i5-1345U	10 (2 P-core + 8 E-core)	12	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel Iris Xe Graphics
Core i5-1340P	12 (4 P-core + 8 E-core)	16	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel Iris Xe Graphics
Core i7-1355U	10 (2 P-core + 8 E-core)	12	P-core 5.0GHz / E-core 3.7GHz	12MB	Intel Iris Xe Graphics
Core i7-1365U	10 (2 P-core + 8 E-core)	12	P-core 5.2GHz / E-core 3.9GHz	12MB	Intel Iris Xe Graphics
Core i7-1360P	12 (4 P-core + 8 E-core)	16	P-core 5.0GHz / E-core 3.7GHz	18MB	Intel Iris Xe Graphics
Core i7-1370P	14 (6 P-core + 8 E-core)	20	P-core 5.2GHz / E-core 3.9GHz	24MB	Intel Iris Xe Graphics

Operating System

Operating System**^[1]

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Linux
- Ubuntu Linux
- No operating system

Notes:

1. Some features may not be supported on the system with Linux preload, including but not limited to Intel RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics

Graphics	Type	Memory	TGP	Key Features
Intel Iris Xe Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.1

Monitor Support

Monitor Support^[1]

Supports up to 4 independent displays (native display and 3 external monitors via Thunderbolt™ and HDMI®)

- Thunderbolt supports up to 5K@60Hz
- HDMI supports up to 4K@60Hz

Notes:

1. Refresh rates >60hz also supported, however max resolution will be limited.

Chipset

Chipset

Intel SoC (System on Chip) platform

Memory

Max Memory

- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable
- 64GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots, 8-channel

Memory Type**

- LPDDR5/x-6000 (32GB or 64GB)^[1]
- LPDDR5/x-6400 (16GB)^[2]

Notes:

1. Installed memory is actually LPDDR5-6400 or LPDDR5x-7500 but run at 6000MHz due to platform limitation.
2. Installed memory is actually LPDDR5-6400 or LPDDR5x-7500 but run at 6400MHz due to platform limitation.

Storage**Storage Support^[1]**

One drive, up to 2TB M.2 2280 SSD

Storage Slot

One M.2 2280 PCIe® 4.0 x4 slot

Storage Type**

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

Notes:

1. The storage capacity supported is based on the test results with current Lenovo® storage offerings. The system may support larger storage as the technology develops.

Removable Storage**Card Reader**

No card reader

Multi-Media**Audio Chip**

High Definition (HD) Audio, Realtek® ALC3306 codec

Speakers

Stereo speakers, 2W x2 woofers and 0.8W x2 tweeters, Dolby® Atmos®

Microphone

Quad-microphone array, 360° far-field, Dolby Voice

Camera**

- FHD 1080p, with privacy shutter, fixed focus
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus
- FHD 1080p + IR discrete, with privacy shutter, MIPI, fixed focus, Computer Vision

Battery**Battery**

Integrated Li-Polymer 57Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Battery Life^[1]

Configuration 1 (max battery life)

MobileMark® 25: up to 13.7 hr with 667 performance score @250nits

JEITA 2.0: up to 27.7 hr @150nits

Local video playback: up to 22.4 hr @150nits

Alternate configuration 2

MobileMark 25: up to 13.05 hr with 637 performance score @250nits

JEITA 2.0: up to 24.7 hr @150nits

Local video playback: up to 20.1 hr @150nits

Alternate configuration 3

MobileMark 25: up to 13.4 hr with 659 performance score @250nits

JEITA 2.0: up to 24.2 hr @150nits

Local video playback: up to 19.5 hr @150nits

Notes:

- Configuration 1 (max battery life): WUXGA (non-touch), Intel i5-1345U, 16GB LPDDR5x, Win 11, 57Wh battery, best power efficiency power mode
Alternate configuration 2: WUXGA (non-touch), Intel i5-1340P, 16GB LPDDR5x, Win 11, 57Wh battery, best power efficiency power mode
Alternate configuration 3: WUXGA (non-touch), Intel i5-1350P, 16GB LPDDR5x, Win 11, 57Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark 2018](#), [MobileMark 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary and depends on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.
Refer to [Microsoft® link](#) for more information about the Windows Performance power slider.

Power Adapter

Power Adapter**^[1]

- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

- AC adapter offerings depend on the country.

DESIGN

Display

Display**^[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
14"	WUXGA (1920x1200)	Multi-touch	IPS	400 nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	Low power, Eyesafe® Certified 2.0, ICC Template color calibration
14"	WUXGA (1920x1200)	Multi-touch	IPS	400 nits	Anti-reflection, Anti-smudge	16:10	1000:1	100% sRGB	85°/85°/85°/85°	Low power, Eyesafe Certified 2.0, ICC Template color calibration
14"	WUXGA (1920x1200)	Multi-touch	IPS	500 nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	ThinkPad® Privacy Guard
14"	WQUXGA (3840x2400)	Multi-touch	OLED	SDR 400nits / HDR 500nits	Anti-reflection, Anti-smudge	16:10	100000:1	100% DCI-P3	85°/85°/85°/85°	Low power, Dolby Vision™, DisplayHDR™ 400, Eyesafe Certified 2.0, ICC Template color calibration

Color Calibration

- ICC Template color calibration
- No color calibration

Touchscreen

OGS (One Glass Solution) multi-touch, supports 10-point touch

Notes:

1. California Electronic Waste Recycling Fee
In California USA, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, please go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Multi-mode

Multi-mode

Laptop, tent, stand, and tablet modes supported by 360° hinge

Input Device

Pen

Lenovo Integrated Pen, with built-in rechargeable battery, 4096 levels of pressure sensitivity, on-board garaged and rechargeable

Keyboard

6-row, spill-resistant, air intake design, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

LED backlight

UltraNav™

TrackPoint® pointing device and glass surface multi-touch touchpad, 56 x 110 mm (2.20 x 4.33 inches)

Mechanical

Dimensions (WxDxH)^[1]

314.4 x 222.3 x 15.53 mm (12.38 x 8.75 x 0.61 inches)

Weight^[2]

Starting at 1.38 kg (3.04 lbs)

Case Color

Storm grey

Case Material

Aluminium (top), aluminium (bottom)

Notes:

1. The system dimensions may vary depending on configurations.
2. The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet^[1]

No onboard Ethernet

WLAN + Bluetooth^{[2][3]}

Intel Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1

WWAN**

- Wireless WAN upgradable to 4G or 5G (with antenna ready)
- Fibocom FM350-GL, 5G Sub-6 GHz, M.2 Card, with embedded eSIM functionality
- Fibocom L860-GL-16, 4G LTE CAT16, MIMO 4x4, M.2 card
- No support

SIM Card

No SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

1. Ethernet support via optional Lenovo USB-C to Ethernet Adapter.
2. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.
3. Wi-Fi 6E full features might be limited by country level restrictions.

Wi-Fi 6E only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

Ports⁽¹⁾

Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt 4 / USB4[®] 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4a)
- 1x HDMI, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports

1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB4 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
USB4 40Gbps (USB 40Gbps): 40 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via Thunderbolt / USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad X1 Yoga® Gen 8](#)

Monitor Cable

Monitor Cable

- Lenovo HDMI to VGA Monitor Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Smart Card Reader

No smart card reader

Fingerprint Reader

Touch style fingerprint reader integrated in power button, match-on-chip

BIOS Security

- Power-on password
- Supervisor password
- System management password
- NVMe password
- FIDO (Fast Identity Online) authentication
- Certificate based BIOS authentication
- Firmware Resiliency 3.0

Other Security

- Camera privacy shutter
- (Optional) IR camera for Windows Hello
- (Optional) Privacy Guard with Privacy Alert
- Glance by Mirametrix®
- (Optional) Computer Vision-based User Presence Sensing including lock on leave

MANAGEABILITY

System Management

System Management**^[1]

- Intel vPro® Enterprise
- Intel vPro Essentials
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty^[1]

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

Notes:

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Sustainability

Material

55% recycled aluminium on bottom cover

90% PCC recycled plastic used in speaker enclosure

25-30% PCC recycled plastic used in the 57Wh battery enclosure

90% PCC recycled plastic used in standard 45W and 65W adapters

Low-temperature solder

Retail or standard packaging: plastic free packaging with 100% bamboo sugarcane fiber

Bulk packaging: 90% recycled and FSC certified content

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES

Bundled Accessories

Bundled Accessories

- Lenovo USB-C to Ethernet Adapter
- None

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- EPEAT™ Gold Registered
- ENERGY STAR® 8.0
- ErP Lot 6/26
- TCO Certified 9.0
- RoHS compliant

Notes:

1. The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.
2. EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

Other Certifications

- (Optional) Intel Evo™ Platform
- (Optional) Eyesafe Certified 2.0
- TÜV Rheinland® Dynamic Privacy Filter (DPF) Certification (Privacy Guard models)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

